


# NS-4912

## Surface Gimbal with Square Trim

### TRIM DIMENSIONS



### FEATURES

#### Trim

Metal trim with gimbal that can be adjusted up to 20°. Adjustable gimbal allows lamp to be mounted flush with trim.

#### Mounting

Trim includes three trim clips that securely mount trim in housing. Remove socket from plate and mount lamp into gimbal ring.

#### Compatible Housings

Compatible with Line Voltage housings.  
See individual specification sheets for more information.

#### Lamp

##### Line Voltage

50W R20/PAR20 Max. (NS-401QAT; NSIC-401QAT; NSR-404QAT)

#### Labels and Listings

cULus Listed for Damp Location when used with compatible housing.

**NORALIGHTING.**

Type


Project

Catalog No.


Lamp/Wattage

### HOUSING DIMENSIONS


#### NS-401QAT

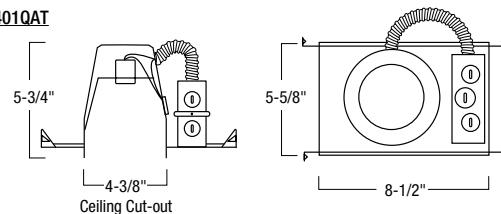

#### NSIC-401QAT

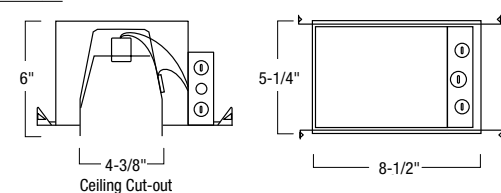

#### NSR-404QAT

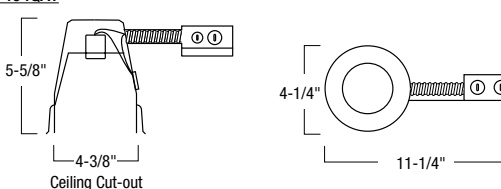

### Surface Gimbal with Square Trim

- ☐ NS-4912BZ: Bronze Surface Gimbal with Bronze Square Trim
- ☐ NS-4912C0: Copper Surface Gimbal with Copper Square Trim
- ☐ NS-4912N: Natural Metal Surface Gimbal with Natural Metal Square Trim
- ☐ NS-4912W: White Surface Gimbal with White Square Trim

### Compatible Housings

#### LINE VOLTAGE

Item Number	Installation Type	Lamp	Dimensions
<input type="checkbox"/> NS-401QAT	Non-IC Air-Tight New Const.	50W R/PAR20	W: 5-5/8" L: 8-1/2" H: 5-5/8"
<input type="checkbox"/> NSIC-401QAT	IC Air-Tight New Construction	50W R/PAR20	W: 5-1/4" L: 8-1/2" H: 6-3/8"
<input type="checkbox"/> NSR-404QAT	Non-IC Air-Tight Remodel	50W R/PAR20	W: 4-1/4" L: 11-1/4" H: 5-5/8"

**NORALIGHTING.**

6505 Gayhart St., Commerce, CA 90040  
www.noralighting.com • Specifications subject to change without notice. © 2011  
Phone: 800.686.6672 • FAX: 800.500.9955 • e-mail: nora@noralighting.com