

# LED 3' SHOP LIGHT

Model: 62-927




## INSTALLATION AND SAFETY INSTRUCTIONS

**IMPORTANT:** Read before installing fixture. Retain for future reference.

### WARNING: Risk of Fire or Electric Shock

- To avoid damage, falling, electric shock or fire, do not modify the fixture or replace accessories without confirming with supplier first.
- Only authorized, qualified personnel should install this fixture and should follow the owner's manual. Any improper installation might cause failure, electric shock, fire or other injury, damage or hazard.
- Disconnect power before installation or maintenance of the fixture.
- Do not dismantle the fixture without the supplier's authorization.
- Do not touch the power supply when the fixture is operating.
- The electrical fitting must be installed by a licensed electrician.
- 120V 60Hz. For indoor or damp location only.
- The LED module is integrated to the fixture and is not removable or replaceable.

**IMPORTANT:** This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

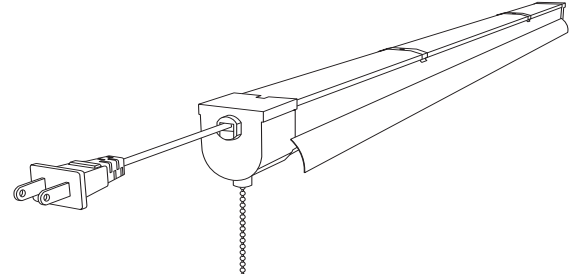

### Parts Included

### Quantity

|                             |   |
|-----------------------------|---|
| 3' Fixture                  | 1 |
| Hanging Chains              | 2 |
| Mounting Screws (Flush Mt.) | 2 |
| Drywall Anchor              | 2 |
| Clip                        | 2 |

### SPECIFICATIONS

| Model  | Description                       | Watts | Volts | Lumens | CCT   | Rated Hours |
|--------|-----------------------------------|-------|-------|--------|-------|-------------|
| 62-927 | 3' LED Shop Light With Pull Chain | 34W   | 120V  | 3000   | 4000K | 50,000      |

### INSTALLATION: Hanging


**NOTE:** Install fixture to any desired hanging height using chain and S-hooks.

1. Install the chain on the ceiling, spacing between suspension lines should be 24 3/4-in. (See Figure 1)
2. Put the clips into the bottom of the fixture. The spacing between the hole in the clips should be 24 3/4-in.
3. Use S-hook to hang the key hole in the clips. (See Figure 2)
4. Plug in power cord to outlet.

Figure 1




Figure 2



### Flush Mount

1. Using a drill with a 1/16-in drill bit, make two small pilot holes at the marked screw hole locations. The spacing between the screw hole locations should be 24 3/4-in. If the fixture is being mounted to drywall, the drywall anchors will need to be installed. To install the drywall anchors, drill two 3/16-in. pilot holes into the drywall. Insert the drywall anchors into the proper holes and tap them in to place so they are flush with the surface of the drywall.
2. Install two clips on mounting surface with mounting screws. Clips should be firmly fixed to the ceiling. (See Figure 3)
3. Put the bottom of fixture into the clips. Fixture should be firmly fixed against the clips.
4. Plug in power cord to outlet.

Figure 3

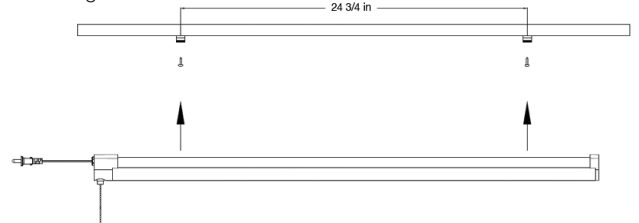

Satco Products, Inc.  
Brentwood, NY 11717