


NS-76
Air-Tight Baffled Lensless Shower Trim

Type
Project
Catalog No.
Lamp/Wattage

TRIM DIMENSIONS

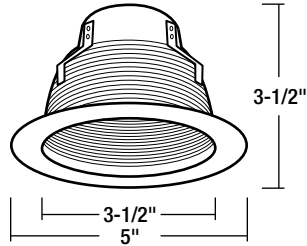

Trim OD: 5"
 Aperture: 3-3/4"
 Height: 3-1/2"

FEATURES

Trim
 Precision spun 0.040 aluminum baffle with deep grooves to reduce aperture glare rated for wet location when used with compatible housings.

Mounting
 Trim includes three trim clips that securely mount trim in housing. Remove socket from plate and mount directly onto trim.




Gasket
 Trim includes pre-installed water tight gasket for wet location listing.

Compatible Housings
 Compatible with Line Voltage housings.
 See individual specification sheets for more information.

Lamp
 Line Voltage
 50W PAR20 Max. (NS-401QAT; NSIC-401QAT; NSR-404QAT)

Labels and Listings
 cULus Listed for Wet Location when used with compatible housing.

HOUSING DIMENSIONS

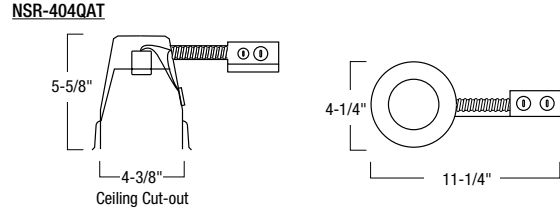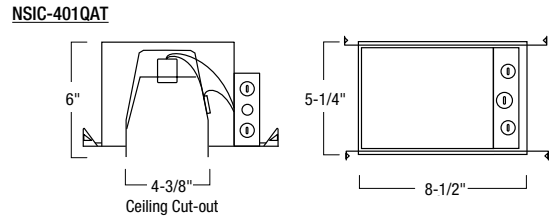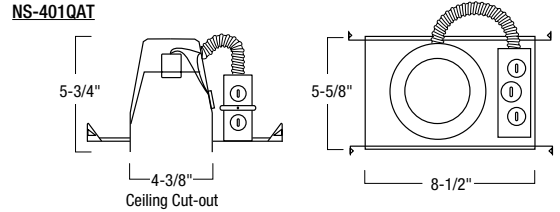

Air-Tight Baffled Lensless Shower Trim

- NS-76B:** Black Air-Tight Lensless Shower Trim with White Flange
- NS-76BZ:** Bronze Air-Tight Lensless Shower Trim with Bronze Flange
- NS-76CO:** Copper Air-Tight Lensless Shower Trim with Copper Flange
- NS-76N:** Natural Metal Air-Tight Lensless Shower Trim with Natural Metal Flange
- NS-76W:** White Air-Tight Lensless Shower Trim with White Flange

Compatible Housings

LINE VOLTAGE			
Item Number	Installation Type	Lamp	Dimensions
<input type="checkbox"/> NS-401QAT	Non-IC Air-Tight New Const.	50W PAR20	W: 5-5/8" L: 8-1/2" H: 5-5/8"
<input type="checkbox"/> NSIC-401QAT	IC Air-Tight New Construction	50W PAR20	W: 5-1/4" L: 8-1/2" H: 6-3/8"
<input type="checkbox"/> NSR-404QAT	Non-IC Air-Tight Remodel	50W PAR20	W: 4-1/4" L: 11-1/4" H: 5-5/8"