


NS-4910

Stepped Baffle with Square Trim

TRIM DIMENSIONS

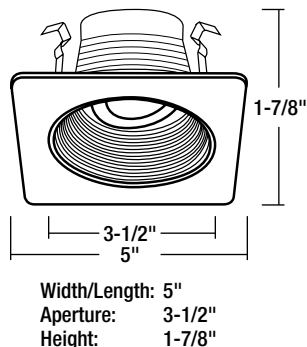

FEATURES

Trim

Precision spun 0.040 aluminum baffle with deep grooves to reduce aperture glare. Non-reflective painted finishes and square trim.

Mounting

Trim includes three trim clips that securely mount trim in housing.

Compatible Housings

Compatible with Line Voltage and Compact Fluorescent housings. See individual specification sheets for more information.

Lamp

Line Voltage

50W R20/PAR20 Max. (NS-401QAT; NSIC-401QAT; NSR-404QAT)

Compact Fluorescent

13W Quad/Triple (NS-406Q; NS-406EL; NSR-408Q; NSR-408EL)

Labels and Listings

cULus Listed for Damp Location when used with compatible housing.

Stepped Baffle with Square Trim

- ☐ **NS-4910BB:** Black Stepped Baffle with Black Square Trim
- ☐ **NS-4910BBZ:** Black Stepped Baffle with Bronze Square Trim
- ☐ **NS-4910BCO:** Black Stepped Baffle with Copper Square Trim
- ☐ **NS-4910BW:** Black Stepped Baffle with White Square Trim
- ☐ **NS-4910BZBZ:** Bronze Stepped Baffle with Bronze Square Trim
- ☐ **NS-4910COCO:** Copper Stepped Baffle with Copper Square Trim
- ☐ **NS-4910NN:** Natural Metal Stepped Baffle with Natural Metal Square Trim
- ☐ **NS-4910WC:** White Stepped Baffle with Chrome Square Trim
- ☐ **NS-4910WG:** White Stepped Baffle with Gold Square Trim
- ☐ **NS-4910WN:** White Stepped Baffle with Natural Metal Square Trim
- ☐ **NS-4910WW:** White Stepped Baffle with White Square Trim

NORALIGHTING.

Type


Project

Catalog No.


Lamp/Wattage

HOUSING DIMENSIONS


NS-401QAT

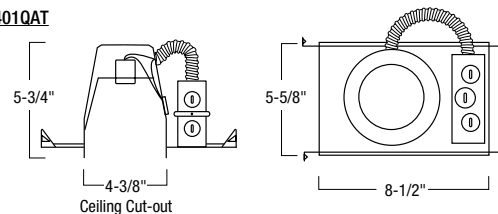


NSIC-401QAT

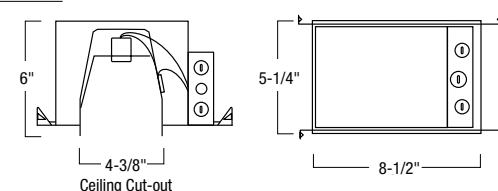


NSR-404QAT

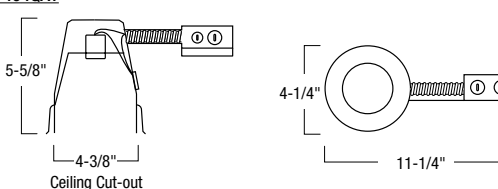

NS-406Q / NS-406EL

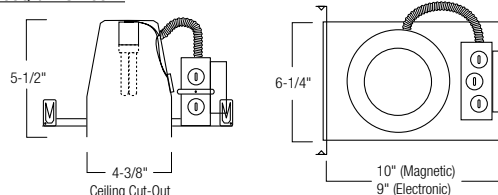

NSR-408Q / NSR-408EL

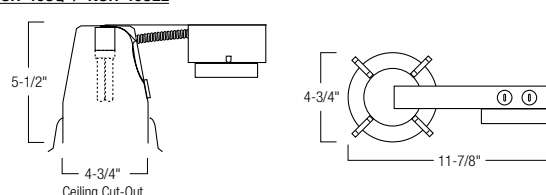

Compatible Housings

LINE VOLTAGE

Item Number	Installation Type	Lamp	Dimensions
<input type="checkbox"/> NS-401QAT	Non-IC Air-Tight New Const.	50W R/PAR20	W: 5-5/8" L: 8-1/2" H: 5-5/8"
<input type="checkbox"/> NSIC-401QAT	IC Air-Tight New Construction	50W R/PAR20	W: 5-1/4" L: 8-1/2" H: 6-3/8"
<input type="checkbox"/> NSR-404QAT	Non-IC Air-Tight Remodel	50W R/PAR20	W: 4-1/4" L: 11-1/4" H: 5-5/8"

COMPACT FLUORESCENT

<input type="checkbox"/> NS-406Q	Non-IC New Constr., Magnetic	13W Quad	W: 6-1/4" L: 10" H: 5-1/2"
<input type="checkbox"/> NS-406EL	Non-IC New Constr., Electronic	13W Quad/Triple	W: 6-1/4" L: 9" H: 5-1/2"
<input type="checkbox"/> NSR-408Q	Non-IC Remodel, Magnetic	13W Quad	W: 4-3/4" L: 11-7/8" H: 5-1/2"
<input type="checkbox"/> NSR-408EL	Non-IC Remodel, Electronic	13W Quad/Triple	W: 4-3/4" L: 11-7/8" H: 5-1/2"

NORALIGHTING

6505 Gayhart St., Commerce, CA 90040
www.noralighting.com • Specifications subject to change without notice. © 2011
Phone: 800.686.6672 • FAX: 800.500.9955 • e-mail: nora@noralighting.com