


NS-47

Adjustable Slot Aperture

TRIM DIMENSIONS

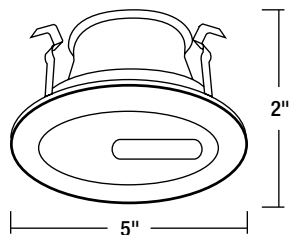

Trim OD: 5"
Height: 2"

FEATURES

Trim

Metal trim with 1-3/8" x 2-1/4" slot aperture that can rotate 358° horizontally. Adjustable ring allows lamp to be mounted on top of the trim and adjustable up to 15°. Separate trim ring available in metal, may also be used with custom combination of plastic or metal ring finishes.

Mounting

Trim includes three trim clips that securely mount trim in housing. Remove socket from plate and mount directly onto adjustable ring.

Compatible Housings

Compatible with Line Voltage housings.
See individual specification sheets for more information.

Lamp

Line Voltage

50W R20/PAR20 Max. (NS-401QAT; NSIC-401QAT; NSR-404QAT)

Labels and Listings

cULus Listed for Damp Location when used with compatible housing.

NORALIGHTING.

Type


Project

Catalog No.


Lamp/Wattage

HOUSING DIMENSIONS


NS-401QAT

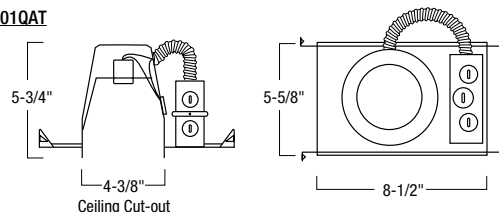

NSIC-401QAT

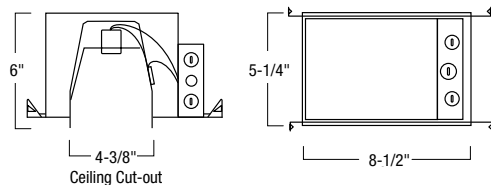

NSR-404QAT

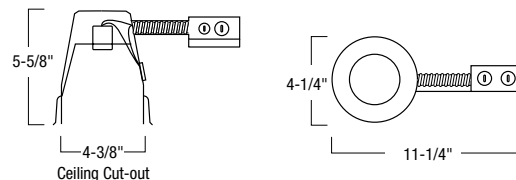

Adjustable Slot Aperture

- ☐ NS-47: White Adjustable Slot Aperture
- ☐ NS-47B: Black Adjustable Slot Aperture
- ☐ NS-47BZ: Bronze Adjustable Slot Aperture
- ☐ NS-47CO: Copper Adjustable Slot Aperture
- ☐ NS-47N: Natural Metal Adjustable Slot Aperture

Compatible Housings

LINE VOLTAGE			
Item Number	Installation Type	Lamp	Dimensions
<input type="checkbox"/> NS-401QAT	Non-IC Air-Tight New Const.	50W R/PAR20	W: 5-5/8" L: 8-1/2" H: 5-5/8"
<input type="checkbox"/> NSIC-401QAT	IC Air-Tight New Construction	50W R/PAR20	W: 5-1/4" L: 8-1/2" H: 6-3/8"
<input type="checkbox"/> NSR-404QAT	Non-IC Air-Tight Remodel	50W R/PAR20	W: 4-1/4" L: 11-1/4" H: 5-5/8"

NORALIGHTING.

6505 Gayhart St., Commerce, CA 90040
www.noralighting.com • Specifications subject to change without notice. © 2011
Phone: 800.686.6672 • FAX: 800.500.9955 • e-mail: nora@noralighting.com