

Type _____
 Project _____
 Catalog No. _____
 Lamp/Wattage _____

NX-504-LED

LED Exit Sign

Lamp: LED Source

PRODUCT DESCRIPTION

Nora Lighting's compact, low profile LED exit signs are as brilliant and visible as standard incandescent signs, yet use a fraction of the power. LED light sources require no maintenance for 25 years—saving greatly on maintenance and upkeep costs. Nora Lighting's LED exits are ideal for commercial and industrial standard non-emergency applications where low maintenance and operating costs are a must.

Universal 120V/277V exit sign utilizing Light Emitting Diode (LED) modules as the primary light source for economy operation. Extra Circuit allows for connection to a separate power source as an emergency generator.

BODY

- 11-3/4" Width x 7-1/4" Height x 1-3/4" Depth
- Injection-molded thermoplastic housing

FACE

- Single or double face available. Lettered face is provided if dual face is preferred.
- 6" high text with color diffusion
- Replaceable knockout directional chevrons
- Alternate "SALIDA" lettering available

MOUNTING

- Wall, side, or ceiling
- Mounting hardware and canopy included

ELECTRICAL

- 120V/277V Input
- Total power usage: 2 Watts
- LED Light Source
- Short Circuit/ Surge protection
- Second circuit provided for external emergency power source

LIFE EXPECTANCY

- LED sources and PC circuitry are rated for a minimum of 25 years with no change in illumination level

APPROVALS & LISTINGS

- UL 924
- NFPA
- NEC
- State & Municipal


LIFE EXPECTANCY

- Spare Lens, RedNEXL-R
- Spare Lens, Green . . .NEXL-G
- Plastic ShieldNEXS-P1
- Metal ShieldNEXS-M3



DIMENSIONS

NX-504-LED

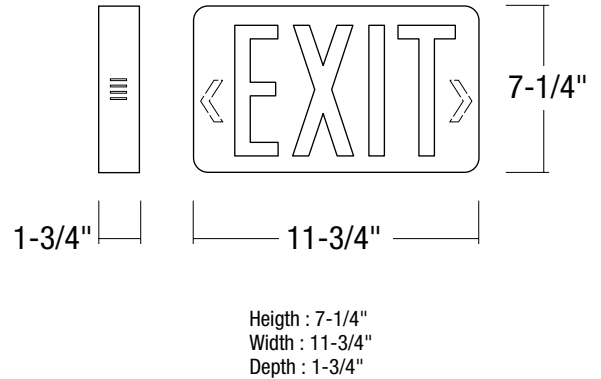

LED Exit Sign

Catalog No.	Housing	Lens Color
<input type="checkbox"/> NX-504	(Blank) = White	<input type="checkbox"/> R = Red
	<input type="checkbox"/> B = Black	<input type="checkbox"/> G = Green
	<input type="checkbox"/> S = Salida	

Create a complete track head number: Example: NX-504BR