


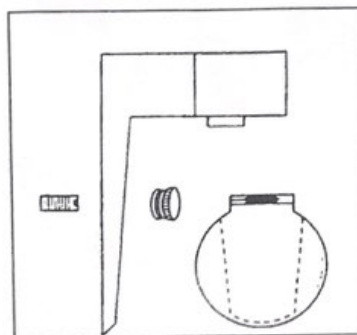
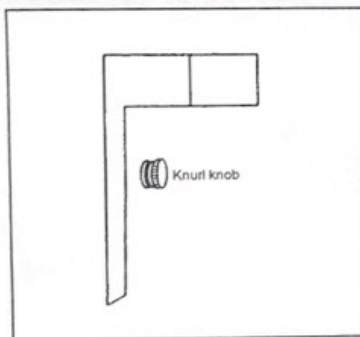
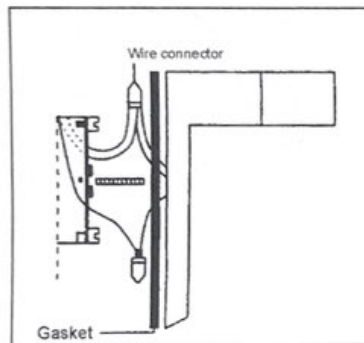


Outdoor Wall Mounting Fixtures Installation Instructions

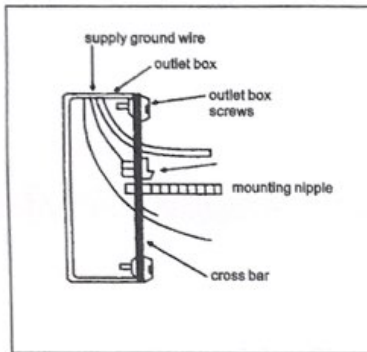

LW-01



LW-02

UL
c US Listed
For wet
Locations

- Remove existing screws from outlet box.
- Assemble 2 mounting screws with crossbar.
- To fasten crossbar to outlet box.

- Connect the wires: Attach black fixture wire to black supply wire; white fixture wire to white supply wire.

Don't mix them up !

- When fixture has ground wire, attach under a green wire binding screw or to supply ground wire.

- Assemble fixture over mounting screw.
- Secure with knurl knob and screw bulb into socket.

- "A" type bulb 150W max.
- Place glass in place by turning clockwise until secure.

- This fixture must be caulked with an acrylic caulking at base of fixture and mounting surface to provide a water tight seal when fixture is installed.