



Replace conventional halogen bulbs. Dimmable LED, 90 CRI.

Color: White

Weight: 0.1 lbs

<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

Driver Info		LED Info	
Watts	6W	Input Voltage	120V
Color Temp	2700K (Soft White)	Power Factor	0.9
Lumens	450	Flicker	<30%
Efficacy	75 LPW	THDi	N/A
Color Accuracy	90 CRI	R9	50
L70 Accuracy	25,000		

## Technical Specifications

### Listings

#### UL Listed:

Yes

#### FCC:

Yes

#### T24:

Complies with Title 24 Appendix JA8

#### Rohs:

Yes

#### CEC Status:

Lawful for sale in California

#### ENERGY STAR V2.0:

This product is ENERGY STAR® Version 2.0 Certified

#### Energy Star ID:

2330066

### Description

#### Dimmable:

Yes, down to 10%

#### R9:

50

#### Lamp Type:

A Series Bulb

#### Bulb Type:

A19

#### Base Type:

E26, Medium Screw Base

#### Material:

Plastic

### Construction

#### Operating Temperature:

-20 - 45°C

#### MOL (inches):

4.41"

#### MOD (inches):

2.4"

### LED Characteristics

#### Lifespan:

25,000-hour LED lifespan based on IES LM-70 results

### Other

#### Equivalent:

40W Incandescent A19

#### Warranty:

3 years

## Technical Specifications (continued)

### Optical

#### Beam Angle:

230°

### Shipping Information

#### Case Qty:

12

### Case Dimensions:

10 x 7.559 x 5.118


### Pallet Quantity of Pieces:

2592

### Pallet Dimensions:

45.35 x 40 x 46.06

## Dimensions

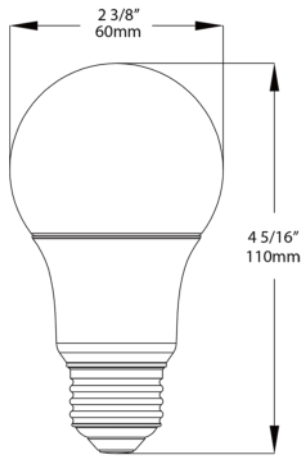

## Features

**A-LINE REPLACEMENT** - Replacement for conventional halogen and incandescent bulbs

**ENERGY SAVINGS** - Save up to 85% on energy

**DAMP RATED** - Suitable for damp locations

**ENCLOSED FIXTURE RATED** - May be used in both enclosed and open fixtures

**SHATTERPROOF** - Plastic lamps for rugged applications

**90 CRI** - Produces rich and vibrant colors

**DIMMABLE** - Compatible with most common dimmer models

## Ordering Matrix

Family	Lamp Power	Base Type	CRI	Color Temp	Dimmable
A19	6	E26	9	27	DIM
	6 = 40W 9 = 60W 15 = 75W 17 = 100W	E26 = E26	8 = 80 CRI	27 = 2700K 30 = 3000K 40 = 4000K 50 = 5000K	DIM = Dimmable