

Project:

Type:

Prepared By:

Date:



UPC: 19813834504



Features and Benefits

BALLAST COMPATIBLE - Uses existing ballast

INSTANT ON - No warm-up time required

HIGH EFFICACY - Provides same output as fluorescent, but uses far less energy

50,000-HOUR LIFESPAN - Lasts 2-3X longer than conventional lamps

MERCURY FREE - Environmentally friendly vs fluorescent technologies

Technical Specifications

Product Type	Compact
Bulb Shape	PLT-H
Finish	Frosted
Wattage	16WW
Wattage Equivalency	42WW Fluorescent
Typical Lumen Output	1850
Efficacy	115 lm/W
Color Temperature	4000K Cool White
CRI	82
Base Type	GX24q
L70 Lifespan	50,000 hours
Operating Temperature	-20°C - 45°C
Dimmable	No
Beam Angle	111°
Warranty	5-Year, No-Compromise Warranty
Installation Type	Type A, Plug and Play
Installation Orientation	Horizontal
For Use in Emergency Fixtures	No
For Use Outdoors in Open Fixtures	No

Electrical Characteristics

Input Voltage	Ballast Dependent
Power Factor	Ballast Dependent
Operating Frequency	Ballast Dependent
Input Current @ 120V	Ballast Dependent
Input Current @ 277V	Ballast Dependent


Listings

UL Listed	Yes
DLC Listed	This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities.
DLC Model Number	T10093
DLC Product Code	PSJVH7R0
CEC Status	Lawful for sale in California

Case and Pallet Dimensions

	QTY	LENGTH	WIDTH	HEIGHT
CASE	20	9.8	7.9	7.5
PALLET	2880	46.9	39.4	49.2

Dimension

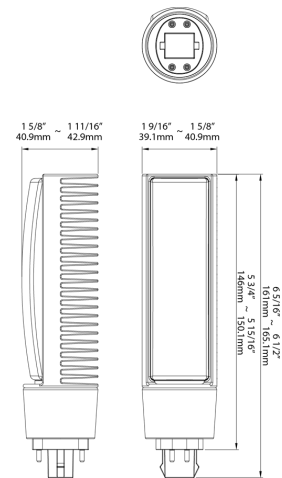

Light Distribution

