


Project: _____ **Type:** _____ **Prepared By:** _____ **Date:** _____

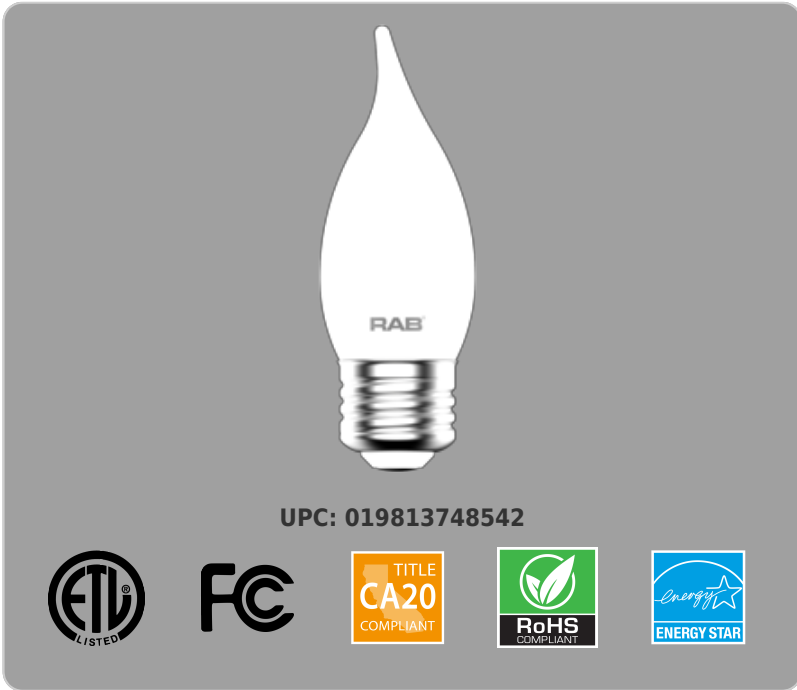

Features and Benefits

Replacement for conventional decorative lamps

Filament LED construction gives a unique traditional look and feel for decorative and ambient applications

Produces rich and vibrant colors, >90CRI

Traditional glass envelop

Rated for use in enclosed and open fixtures in dry and damp locations

Longer lifespan compared to legacy equivalents minimizes replacement and maintenance costs

Title 20 Compliant, ENERGY STAR Compliant, UL Listed

Smooth uniform dimming down to 10% (check dimmer compatibility list)

Technical Specifications		
<p>Performance</p> <hr/> <p>Product Type: Decorative</p> <p>Input Wattage: 3W</p> <p>Typical Lumen Output: 300</p> <p>Efficacy: 91 lm/W</p> <p>Color Temperature: 2700K Soft White</p> <p>CRI: 90</p>	<p>L70 Lifespan: 15,000 Hours</p> <p>Dimmable: Yes, down to 10%</p> <p>Construction</p> <hr/> <p>Bulb Shape: BA11</p> <p>Base Type: E26</p> <p>Beam Angle: 360°</p> <p>Technical Specifications</p> <hr/> <p>Finish: Frosted</p>	<p>For Use in Emergency Fixtures: No</p> <p>For Use Outdoors in Open Fixtures: No</p> <p>Other</p> <hr/> <p>Equivalency: 40W Incandescent</p> <p>Warranty (Years): RAB warrants that our LED products will be free from defects in materials and workmanship for a period of three (3) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.</p>

Technical Specifications (continued)

Electrical

Power Factor:

0.7

Operating Temperature:

-20°C - 45°C

Input Voltage:

120V

Electrical Characteristics

Flicker:

<30%

Compliance

ETL Qualified:

Yes

ENERGY STAR V2.0:

This product is ENERGY STAR® Version 2.0 Certified

Energy Star ID:

2330345


CEC Status:

Lawful for sale in California

Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	12	6.5	4.9	5.1
PALLET	3180	38.4	46.3	37.2

Dimension

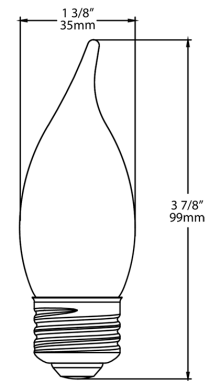

Light Distribution

