

**Project:**

**Type:**

**Prepared By:**

**Date:**



UPC: 019813834047



**Features and Benefits**

Replacement for conventional decorative lamps  
 Filament LED construction gives a unique traditional look and feel for decorative and ambient applications  
 Traditional glass envelop  
 Rated for use in enclosed and open fixtures in dry and damp locations  
 Longer lifespan compared to legacy equivalents minimizes replacement and maintenance costs  
 ENERGY STAR Compliant, UL Listed  
 Smooth uniform dimming down to 10% (check dimmer compatibility list)

**Technical Specifications**

**Performance**

**Product Type:**

Decorative

**Input Wattage:**

4W

**Typical Lumen Output:**

450

**Efficacy:**

100 lm/W

**Color Temperature:**

2700K Soft White

**CRI:**

80

**L70 Lifespan:**

15,000 Hours

**Dimmable:**

Yes

**Construction**

**Bulb Shape:**

A15

**Base Type:**

E26

**Beam Angle:**

300°

**Technical Specifications**

**Finish:**

Clear

**For Use Outdoors in Open Fixtures:**

Yes

**Other**

**Equivalency:**

40W Incandescent

**Warranty (Years):**

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of three (3) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

**Electrical**

**Power Factor:**

0.7

## Technical Specifications (continued)

### Electrical

**Operating Temperature:**

-20°C - 45°C

**Input Voltage:**

120V

**Operating Frequency:**

60 Hz

### Electrical Characteristics

**Input Current @ 120V:**

58mA

### Compliance

**UL Listed:**

Yes

**ENERGY STAR V2.0:**

This product is ENERGY STAR® Version 2.0 Certified

**Energy Star Model Number:**

A10032

**Energy Star ID:**

2340544


**CEC Status:**

Not lawful for sale in California

## Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
<b>CASE</b>	12	6.3	4.3	8.5
<b>PALLET</b>	3600	44.9	46.5	40.2

## Dimension

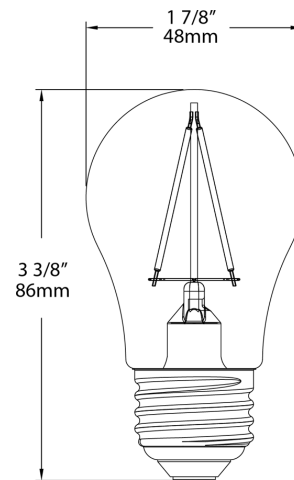

## Light Distribution

