

Project:

Type:

Prepared By:

Date:



UPC: 019813751504



Features and Benefits

Replaces CFL 18W, 26W, and 32W G24q Lamps

Ballast Compatible. Directly Compatible with Most Existing CFL Ballasts.

Compatible with G24q / GX24q (4-pin CFL) installations

50,000 hour Lifespan

Environmentally friendly, no mercury used

UL Listed, DLC Listed

Rated for use in enclosed and open fixtures in dry or damp locations

Non-Dimmable

5 Year No Compromise Warranty

Technical Specifications

Performance

Product Type:

Compact

Input Wattage:

9W

Typical Lumen Output:

1000

Efficacy:

111 lm/W

Color Temperature:

5000K Daylight

CRI:

82

L70 Lifespan:

50,000 Hours

Dimmable:

No

Construction

Bulb Shape:

PLC

Base Type:

G24q

Technical Specifications

Finish:

Frosted

For Use Outdoors in Open Fixtures:

No

Other

Equivalency:

26W Fluorescent

Warranty (Years):

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Electrical

Power Factor:

Ballast Dependent

Operating Temperature:

-20°C - 45°C

Technical Specifications (continued)

Electrical

Input Voltage:

Ballast Dependent

Operating Frequency:

Ballast Dependent

Installation

Installation Type:

Type A, Plug and Play

Installation Orientation:

Vertical

Electrical Characteristics

THDi:

<20%

Compliance

UL Listed:

Yes

DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities.

DLC Model Number:

PLC-9-V-850-DIR

DLC Product Code:

PLXB2K0AYNNI

CEC Status:

Lawful for sale in California


Application:

Suitable for damp locations and totally enclosed fixtures.

Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	12	8.1	6.1	5.1
PALLET	3456	47.2	39.4	47.6

Wiring Diagram

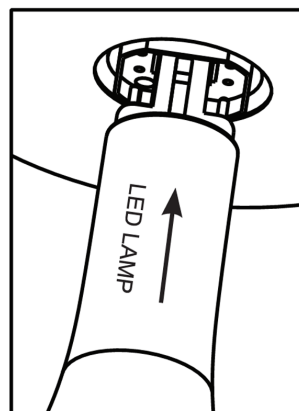

Dimension

