

Project:

Type:

Prepared By:

Date:



UPC: 019813751511



Features and Benefits

Replaces 18W/26W/32W G24d & G24q CFL Lamps

Ballast Bypass. Integral Driver enables lamp to be wired directly to line voltage without need for an external driver or ballast

Compatible with G24d / GX24d & G24q / GX24q installations

50,000 hour Lifespan

Environmentally friendly, no mercury used

UL Classified

Rated for use in enclosed and open fixtures in dry or damp locations

Non-Dimmable

5 Year No Compromise Warranty

Technical Specifications

Performance

Product Type:

Compact

Input Wattage:

9W

Lumens (Nominal):

950lm

Efficacy:

106 lm/W

Color Accuracy (CRI):

82 CRI

L70 Lifespan:

50,000 Hours

Dimmable:

No

Construction

Bulb Shape:

PLC

Finish:

Frosted

Base Type:

G24d

For Use Outdoors in Open Fixtures:

No

Other

Equivalency:

26W Fluorescent

Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

LED Characteristics

Color Temperature:

3000K Warm White

Electrical

THD:

<20%

Power Factor:

0.9

Operating Temperature:

-20°C - 45°C (-4°F - 113°F)

Technical Specifications (continued)

Electrical

Input Voltage:

120-277V AC

Operating Frequency:

50/60Hz

Installation

Installation Type:

Type B, Ballast Bypass

Installation Orientation:

Horizontal

Compliance

UL Recognized:

Yes

UL Classified:

Yes

CEC Status:

Not lawful for sale in California



Application:

Suitable for damp locations and totally enclosed fixtures.


Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	12	6.5	4.9	7.1
PALLET	4032	47.2	39.4	49.6

Wiring Diagram

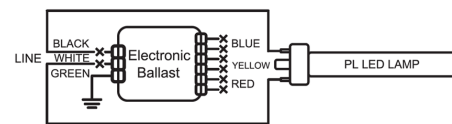

Dimension

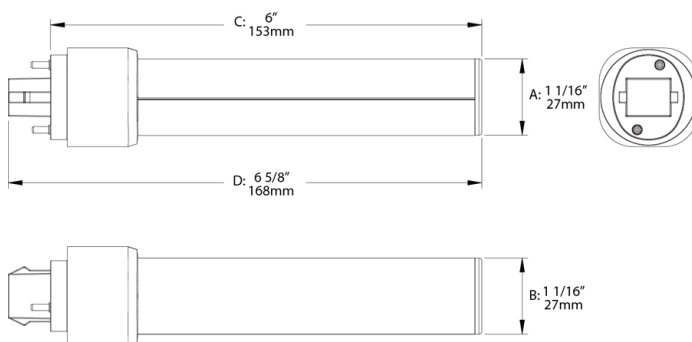

Light Distribution

