



Project:	Type:
Prepared By:	Date:

Technical Specifications

Performance

Product Type:

A-Line

Input Wattage:

5W

Lumens (Nominal):

460lm

Efficacy:

92 lm/W

Color Accuracy (CRI):

80 CRI

L70 Lifespan:

15,000-Hour LED lifespan based on IES LM-70 results

Dimmable:

Yes

Compliance

UL Listed:

Suitable for damp locations

Enclosed Fixtures:

Suitable for use in enclosed fixtures

LED Characteristics

Color Temperature:

2700K

Construction

Bulb Shape:

A19

Base Type:

E26

Optical

Beam Angle:

230°

Electrical

Power Factor:

0.7

Technical Specifications (continued)

Electrical

Operating Temperature:

-20°C - 45°C (-4°F - 113°F)

Input Voltage:

120V

Operating Frequency:

60 Hz

Other

Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of three (3) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.


Wattage Equivalency:

40W Incandescent


Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	12	15.4	5.2	4.9
PALLET	2880	41.34	47.24	45.47

Dimension



Light Distribution

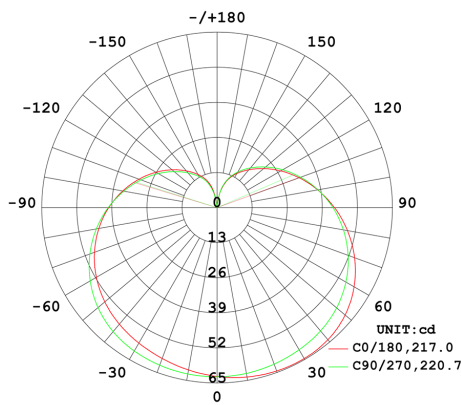

Features

- Replacement for High-output Incandescent or lower wattage metal halide and high pressure sodium lamps
- Rated for use in enclosed and open fixtures in dry or damp locations
- Ideal for post top, bollards, and outdoor corridor lighting
- Suitable for use in a base-up or base-down position

Ordering Matrix

Family		Wattage		Base Type		CRI/Color Temp		Dimmable
A19	–	5	–	E26	–	827	–	DIM
		5 = 5W		E26 = E26 Base		850 = 80 CRI, 5000K		DIM = Dimmable
		9 = 9W		GU24 = GU24 Base		840 = 80 CRI, 4000K		DIM 120V = Dimmable
		10 = 10W				835 = 80 CRI, 3500K		
		13 = 13W				830 = 80 CRI, 3000K		
		15 = 15W				827 = 80 CRI, 2700K		
		16 = 16W						
		23 = 23W						