



Color: Copper

Weight: 0.4 lbs

Project:

Type:

Prepared By:

Date:

Driver Info

LED Info

Type	Constant Current	Watts	12W
120V	0.11A	Color Temp	3000K
208V	N/A	Color Accuracy	90 CRI
240V	N/A	L70 Lifespan	50,000 Hours
277V	N/A	Lumens	750 lm
Input Watts	12W	Efficacy	62.5

Technical Specifications

Performance

Description:

The DISK34 is an ultra low profile surface-mount, ideal solution for new construction and retrofit applications. IC rated for direct contact with insulation, air tight, suitable for indoor applications in dry and damp environments. Mounting kit for recessed housing sold separately.

Product Type:

Surface & Flush Mounts

Input Wattage:

12W

Lumens (Nominal):

750lm

Efficacy:

62.5 lm/W

L70 Lifespan:

50,000-Hour LED lifespan based on IES LM-70 results

Compliance

UL Listed:

Suitable for damp locations

UL Classified:

Yes

ENERGY STAR V2.2:

ENERGY STAR® Version 2.2 Certified

Energy Star ID:

2387695

Fixture Rating:

Open

IC Rated:

Suitable for direct contact with insulation

Electrical

Dimming Driver:

TRIAC compatible dimmer with dimming as low as 5%

Power Factor:

0.9

Technical Specifications (continued)

Electrical**Flicker:**

<30%

Input Voltage:

120V

Operating Frequency:

60Hz

Construction**Material:**

Aluminum

Trim Style:

Smooth Trim

Shape:

Round

Mounting:

Surface mount

Operating Temperature:

-30°C (-22°F) to 40°C (104°F)

Optical**Beam Angle:**

110°

LED Characteristics**R9 Value:**

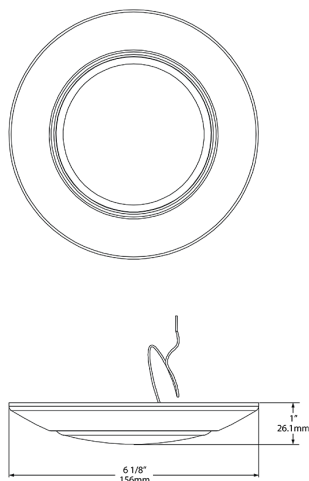
High color performance with R9 greater than 50

Other**Warranty:**

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions**Features**

- Super low profile backlit LED with driverless design
- Stamped aluminum housing
- New construction or retrofit applications
- Simple and quick installation from below the ceiling
- Installs on standard 4" and 6" junction boxes
- Can be retrofitted to existing downlight housings with option accessory
- Suitable for Damp locations
- Dimmable down to 5% on compatible dimmers
- 5-Year, limited warranty

Ordering Matrix

Family		Size	Shape	Wattage	CRI/Color Temp	Voltage	Finish	Trim
DSK34	-	4	R	12	930	120	BR	S
		4 = 4"	R = Round	12 = 12W	950 = 90 CRI, 5000K	120 = 120V	W = White	S = Smooth
		6 = 6"		14 = 14W	940 = 90 CRI, 4000K		B = Black	
				16 = 16W	935 = 90 CRI, 3500K		BR = Bronze	
				16.5 = 16.5W	930 = 90 CRI, 3000K		BN = Brushed Nickel	
					927 = 90 CRI, 2700K			