



Color: White

Weight: 0.4 lbs

Project:

Type:

Prepared By:

Date:

Driver Info

Type	Constant Current
120V	0.10A
208V	N/A
240V	N/A
277V	N/A
Input Watts	10W

LED Info

Watts	10W
Color Temp	3000K/4000K/5000K
Color Accuracy	90 CRI
L70 Lifespan	50,000 Hours
Lumens	600 lm
Efficacy	60

Technical Specifications**Performance****Description:**

3CCT Selectable Low-profile, surface-mount Disk for new construction and retrofit applications. Integrated passive infrared (PIR) sensor with a 30s timeout make this ideal for use in a variety of applications including hallways, bathrooms, stairways, closets, and canopies. Mounting kit for recessed housing sold separately.

Product Type:

Surface & Flush Mounts

Input Wattage:

10W

Lumens (Nominal):

600lm

Efficacy:

60 lm/W

L70 Lifespan:

50,000-Hour LED lifespan based on IES LM-70 results

Electrical**Dimming Driver:**

TRIAC compatible dimmer

THD: $\leq 20\%$ **Power Factor:** ≥ 0.9 **Flicker:** $\leq 30\%$ **Input Voltage:**

120V

Operating Frequency:

60Hz

Construction**Material:**

Metal

Trim Style:

Smooth Trim

Technical Specifications (continued)

Construction

Shape:

Round

Mounting:

Surface and recessed mount

Operating Temperature:

-20°C (-4°F) to 40°C (104°F)

Size:

4"

LED Characteristics

R9 Value:

High color performance with R9 greater than or equal to 50

Compliance

UL Classified:

Yes

UL Listed:

Yes

ENERGY STAR V2.2:

ENERGY STAR® Version 2.2 Certified

Energy Star ID:

2389599

Other

Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.


Trade Agreements Act Compliant:

This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

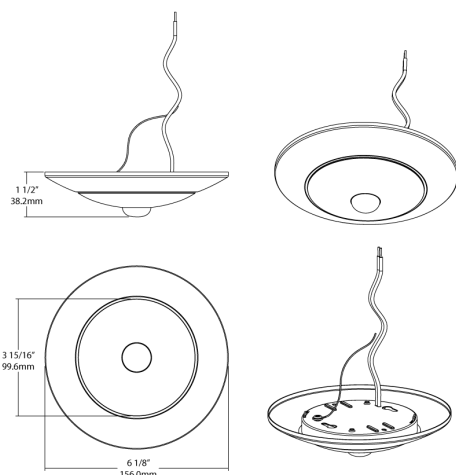

Features

- Low profile back-lit design made of durable thermoplastic housing with frosted lens
- New construction or retrofit applications
- Installs on standard junction boxes
- Suitable for indoor/outdoor use in dry, damp, and wet locations
- Suitable for use in closets when installed in accordance with NEC guidelines
- Integrated passive infrared (PIR) sensor with a 30s timeout

Ordering Matrix

Family	Size	Shape	Wattage	CRI/Color Temp	Voltage	Finish	Trim	Sensor
DSKFA	4	R	10	9CCT	120	W	S	/PIR
	4 = 4"	R = Round	10 = 10W	9CCT = 90 CRI, 5000/4000/3500/3000/2700K	120 = 120V	W = White	S = Smooth	/PIR = PIR Sensor
	6 = 6"		15 = 15W					