



Color: White

Weight: 1.4 lbs

Project:

Type:

Prepared By:

Date:

Driver Info

Type	Constant Current
120V	0.20A
208V	N/A
240V	N/A
277V	N/A
Input Watts	22W

LED Info

Watts	22W
Color Temp	2700K/3000K/3500K/4000K/5000K
Color Accuracy	90 CRI
L70 Lifespan	50,000 Hours
Lumens	2,000 lm
Efficacy	90.9

Technical Specifications

Performance

Description:

5CCT Selectable Low-profile, surface-mount Disk for new construction and retrofit applications. Ideal for use in a variety of applications including hallways, bathrooms, stairways, closets, and canopies.

Product Type:

Surface & Flush Mounts

Input Wattage:

22W

Lumens (Nominal):

2000lm

Efficacy:

90.9 lm/W

L70 Lifespan:

50,000-Hour LED lifespan based on IES LM-70 results

Compliance

UL Listed:

Suitable for wet locations

UL Classified:

Yes

ENERGY STAR V2.2:

ENERGY STAR® Version 2.2 Certified

Energy Star ID:

2389594

Electrical

Dimming Driver:

TRIAC compatible dimmer with dimming as low as 10%.

THD:

≤20%

Power Factor:

≥0.9

Flicker:

≤30%

Technical Specifications (continued)

Electrical

Input Voltage:

120V

Operating Frequency:

60Hz

Construction

Material:

Plastic

Trim Style:

Smooth Trim

Base Type:

E26

Shape:

Round

Mounting:

Surface and recessed mount

Operating Temperature:

-20°C (-4°F) to 40°C (104°F)

Size:

8"

LED Characteristics

R9 Value:

High color performance with R9 greater than or equal to 50

Other


Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

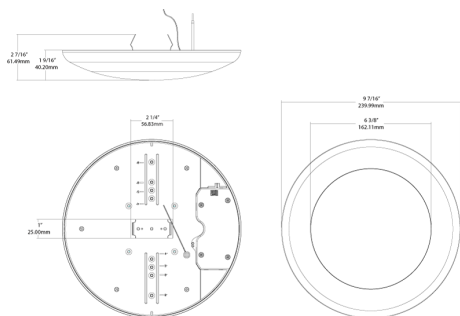

Features

- Low profile back-lit design made of durable thermoplastic housing with frosted lens
- New construction or retrofit applications
- Installs on standard junction boxes
- Suitable for indoor/outdoor use in dry, damp, and wet locations
- Suitable for use in closets when installed in accordance with NEC guidelines
- Dimmable down to 5% on compatible dimmers, see Dimmer Compatibility List
- 5-Year, limited warranty

Ordering Matrix

Family	Size	Shape	Wattage	CRI/Color Temp	Voltage	Finish	Trim
DSK	8	R	22	9FA	120	W	S
4 = 4" 6 = 6" 8 = 8"		R = Round	7 = 7W 11 = 11W 22 = 22W	9FA = 90 CRI, 5000/4000/3500/3000/2700K	120 = 120V	W = White	S = Smooth