



UPC: 192552014519



Weight: 0.0 lbs

Project:	Type:
Prepared By:	Date:

Technical Specifications

Performance		Electrical
Product Type:	Wattage Equivalency:	Power Factor:
A-Line	150W Incandescent / Metal Halide or High Pressure Sodium	>0.9
Input Wattage:	Compliance	Dimmable:
23W	UL Listed:	Yes
Lumens (Nominal):	Suitable for damp locations	Operating Temperature:
2550lm	Enclosed Fixtures:	-20°C - 40°C
Efficacy:	Suitable for use in enclosed fixtures	Input Voltage:
110.9 lm/W	LED Characteristics	120V
L70 Lifespan:	Color Temperature:	
25,000-Hour LED lifespan based on IES LM-70 results	3000K	
	Color Accuracy (CRI):	
	>80 CRI	

Technical Specifications (continued)

Electrical**Operating Frequency:**

60 Hz

Construction**Bulb Shape:**

A21

Base Type:

E26

Enclosure Material:

Die Cast Aluminum

Optical**Beam Angle:**

230°

Other**Warranty:**

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of three (3) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.


Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	12	12.8	9.6	5.9
PALLET	0	0	0	0

Dimension

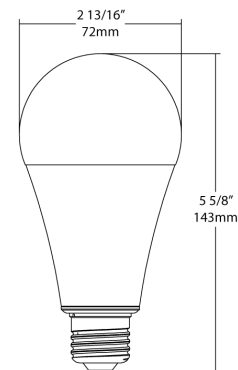

Features

Replacement for High-output Incandescent or lower wattage metal halide and high pressure sodium lamps

Rated for use in enclosed and open fixtures in dry or damp locations

Ideal for post top, bollards, and outdoor corridor lighting

Suitable for use in a base-up or base-down position

Ordering Matrix

Family		Wattage		Base Type		CRI/Color Temp		Dimmable
A21	–	23	–	E26	–	830	–	DIM 120V
		5 = 5W		E26 = E26 Base		850 = 80 CRI, 5000K		DIM = Dimmable
		9 = 9W		GU24 = GU24 Base		840 = 80 CRI, 4000K		DIM 120V = Dimmable
		10 = 10W				835 = 80 CRI, 3500K		
		13 = 13W				830 = 80 CRI, 3000K		
		15 = 15W				827 = 80 CRI, 2700K		
		16 = 16W						
		23 = 23W						