



UPC: 192552014496



Weight: 0.0 lbs

|              |       |
|--------------|-------|
| Project:     | Type: |
| Prepared By: | Date: |

Technical Specifications

| Performance                                         |                                                          | Electrical             |
|-----------------------------------------------------|----------------------------------------------------------|------------------------|
| Product Type:                                       | Wattage Equivalency:                                     | Power Factor:          |
| A-Line                                              | 150W Incandescent / Metal Halide or High Pressure Sodium | >0.9                   |
| Input Wattage:                                      | Compliance                                               | Dimmable:              |
| 23W                                                 | UL Listed:                                               | Yes                    |
| Lumens (Nominal):                                   | Suitable for damp locations                              | Operating Temperature: |
| 2550lm                                              | Enclosed Fixtures:                                       | -20°C - 40°C           |
| Efficacy:                                           | Suitable for use in enclosed fixtures                    | Input Voltage:         |
| 110.9 lm/W                                          | LED Characteristics                                      | 120V                   |
| L70 Lifespan:                                       | Color Temperature:                                       |                        |
| 25,000-Hour LED lifespan based on IES LM-70 results | 3000K                                                    |                        |
|                                                     | Color Accuracy (CRI):                                    |                        |
|                                                     | >80 CRI                                                  |                        |

## Technical Specifications (continued)

**Electrical****Operating Frequency:**

60 Hz

**Construction****Bulb Shape:**

A21

**Base Type:**

E26

**Enclosure Material:**

Plastic

**Optical****Beam Angle:**

230°

**Other****Warranty:**

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of three (3) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).


**Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

## Case and Pallet Dimensions

|        | QTY | LENGTH (in) | WIDTH (in) | HEIGHT (in) |
|--------|-----|-------------|------------|-------------|
| CASE   | 12  | 12.8        | 9.6        | 5.9         |
| PALLET | 0   | 0           | 0          | 0           |

## Dimension

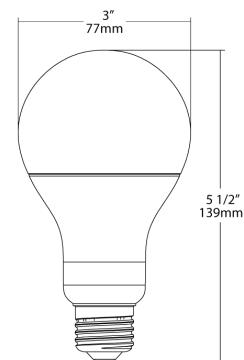

## Features

Replacement for High-output Incandescent or lower wattage metal halide and high pressure sodium lamps

Rated for use in enclosed and open fixtures in dry or damp locations

Ideal for post top, bollards, and outdoor corridor lighting

Suitable for use in a base-up or base-down position

## Ordering Matrix

| Family |   | Wattage  |   | Base Type        |   | CRI/Color Temp      |   | Dimmable            |
|--------|---|----------|---|------------------|---|---------------------|---|---------------------|
| A21    | – | 23       | – | E26              | – | 830                 | – | DIM                 |
|        |   | 5 = 5W   |   | E26 = E26 Base   |   | 850 = 80 CRI, 5000K |   | DIM = Dimmable      |
|        |   | 9 = 9W   |   | GU24 = GU24 Base |   | 840 = 80 CRI, 4000K |   | DIM 120V = Dimmable |
|        |   | 10 = 10W |   |                  |   | 835 = 80 CRI, 3500K |   |                     |
|        |   | 13 = 13W |   |                  |   | 830 = 80 CRI, 3000K |   |                     |
|        |   | 15 = 15W |   |                  |   | 827 = 80 CRI, 2700K |   |                     |
|        |   | 16 = 16W |   |                  |   |                     |   |                     |
|        |   | 23 = 23W |   |                  |   |                     |   |                     |