A19-16-GU24-827-DIM

RAB | Residential



UPC: 019813748382

RoHS COMPLIANT

ENERGY STAR

Color: White

Weight: 0.3 lbs

Project:	Type:
Prepared By:	Date:

Technical Specifications

Performance

Product Type:
A-Line

Input Wattage:
15.5W

Wattage Equivalency:
100W Incandescent

Lumens (Nominal):
1600lm

Efficacy:
93 lm/W

L70 Lifespan:
15,000 Hours

Construction

Bulb Shape:
A19

Base Type:
GU24

For Use Outdoors in Open Fixtures:
No

LED Characteristics

Color Temperature:
2700K Soft White

Color Accuracy (CRI):
80 CRI

Electrical

Power Factor:
≥0.7

Operating Temperature:
-20°C - 45°C (-4°F - 113°F)

Dimmable:
Yes, down to 10%

Copyright © 2022 RAB Lighting All Rights Reserved Note: Specifications are subject to change at any time without notice

Technical Specifications (continued)

Electrical

Input Voltage:

120V

Operating Frequency:

60 Hz

Optical

Beam Angle:

230°

Other

Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of three (3) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Compliance

ENERGY STAR V2.0:

This product is ENERGY STAR® Version 2.0 Certified

Energy Star ID:

2329587

California Energy Commission (CEC) Status:

Not lawful for Sales in California

Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	12	15.4	5.2	4.9
PALLET	2268	47.2	39.4	45.7

Dimension

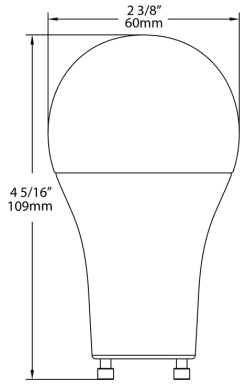

Copyright © 2022 RAB Lighting All Rights Reserved Note: Specifications are subject to change at any time without notice

A19-16-GU24-827-DIM

RAB | Residential

Light Distribution

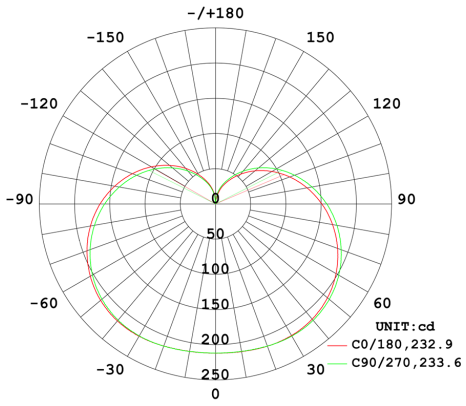

Features

- Replacement for High-output Incandescent or lower wattage metal halide and high pressure sodium lamps
- Rated for use in enclosed and open fixtures in dry or damp locations
- Ideal for post top, bollards, and outdoor corridor lighting
- Suitable for use in a base-up or base-down position

Ordering Matrix

Family		Wattage		Base Type		CRI/Color Temp		Dimmable
A19	–	16	–	GU24	–	827	–	DIM
		5 = 5W **9 =** 9W **10 =** 10W **13 =** 13W **15 =** 15W **16 =** 16W **23 =** 23W		**E26 =** E26 Base **GU24 =** GU24 Base		**850 =** 80 CRI, 5000K **840 =** 80 CRI, 4000K **835 =** 80 CRI, 3500K **830 =** 80 CRI, 3000K **827 =** 80 CRI, 2700K		**DIM =** Dimmable **DIM 120V =** Dimmable

Copyright © 2022 RAB Lighting All Rights Reserved Note: Specifications are subject to change at any time without notice