



Color: Brushed nickel

Weight: 4.4 lbs

Project:

Type:

Prepared By:

Date:

Driver Info

Type	Constant Current
120V	0.30A
208V	0.16A
240V	0.14A
277V	0.13A
Input Watts 32W	

LED Info

Watts	32W
Color Temp	2700K/3000K/3500K/4000K/5000K
Color Accuracy	90 CRI
L70 Lifespan	50,000 Hours
Lumens	2,200 lm
Efficacy	68.8

Technical Specifications

Performance

Description:

5CCT selectable, low maintenance, decorative back-lit LED retrofit fixture installs on standard junction boxes. This universal voltage (120-277V) fixture also includes an integrated Microwave (MVS) sensor with a 30-second timeout.

Product Type:

Surface & Flush Mounts

Input Wattage:

32W

Lumens (Nominal):

2,200 Lm

Efficacy:

68.8 Lm/W

L70 Lifespan:

50,000-Hour LED lifespan based on IES LM-70 results

Compliance

UL Listed:

Suitable for wet locations

ENERGY STAR V2.2:

ENERGY STAR® Version 2.2 Certified

Energy Star ID:

2389833

Construction

Material:

Metal and Plastic

Trim Style:

Smooth Trim

Shape:

Round

Mounting:

Surface mount

Operating Temperature:

-20°C (-4°F) to 40°C (104°F)

Technical Specifications (continued)

Construction

Size:

18"

Optical

Beam Angle:

130°

LED Characteristics

R9 Value:

High color performance with R9 greater than or equal to 50

Electrical

THD:

≤20%

Power Factor:

≥0.9

Flicker:

≤30%

Input Voltage:

120-277V

Operating Frequency:

50/60Hz

Other

Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.


Trade Agreements Act Compliant:

This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

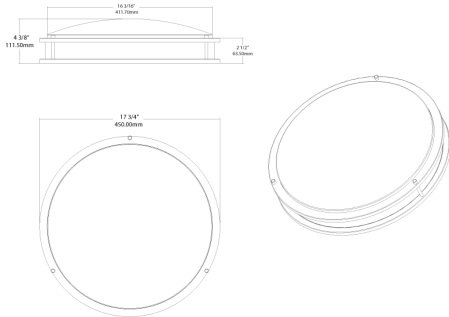

Features

- Surface Mount to ceiling or wall
- Field adjustable "set and forget" color temperature
- Diffused lens provides soft, smooth light
- Ideal for hospitality and multi-family residential applications
- Suitable for wet and damp locations
- 50,000-Hour lifespan

Ordering Matrix

Family	Type		Size	Shape		Wattage		CRI/Color Temp		Voltage	Dimming		Finish		Sensor	Options
CRVFA	D	–	18	R	–	32	–	9CCT	–	UNV		–	BN	–	/MVS	
	S = Smooth D = Decorative		11 = 11" 12 = 12" 14 = 14" 18 = 18" 19 = 19"	R = Round		16 = 16W 20 = 20W 32 = 32W		9CCT = 90 CRI, CCT Selectable		120 = 120V UNV = 120-277V	Blank = 0-10V Dimming T = Triac Dimming		W = White BN = Brushed Nickel		Blank = No Sensor /MVS = Microwave Occupancy Sensor	Blank = No Option /EM = Battery Backup /EMBB = Battery Backup