

INSTRUCTIONS


RMKPANEL - RECESSED KIT INSTALLATION

RAB®


RAB Lighting is committed to creating high-quality, affordable, well-designed and energy-efficient LED lighting and controls that make it easy for electricians to install and end users to save energy. We'd love to hear your comments. Please call the Marketing Department at 888-RAB-1000 or email: marketing@rablighting.com



RMKPANEL1X4



RMKPANEL2X2

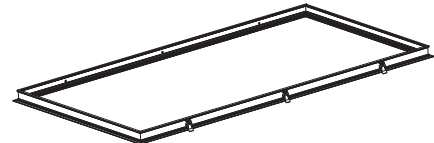

RMKPANEL2X4

IMPORTANT

READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.

RAB fixtures must be wired in accordance with the National Electrical Code and all applicable local codes. Proper grounding is required for safety. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

WARNING: Make certain power is OFF before installing the fixture. No user serviceable parts inside.

CEILING MOUNTING

The fixture is suitable only for **INDOOR RECESSED CEILING** application. **Nominal sheet rock cut-out opening is:**
1x4: 13" x 48 5/8"; 2x2: 24 3/4" x 24 5/8"; 2x4: 24 3/4" x 48 5/8".

To mount in an insulated or non-insulated sheet rock ceiling follow the steps below.

1. Assemble the four pieces of the **RMKPANEL Kit** with the screws provided as shown in **Fig 1**.
2. Flex the **Spring Clips** (4) up on one side of **RMKPANEL Kit** and insert into ceiling as shown in **Fig. 2**. Once one side is in repeat on the opposite side to fully install into the ceiling.
3. Follow wiring directions on fixture installation instructions to complete electrical splices.
4. Rotate and slide the **Fixture** as required to fit through the drywall opening as indicated by the directional arrow in **Fig. 3** and place it on the **RMKPANEL Kit**. Refer to fixture installation instructions for product specific mounting requirements.

Fig. 1


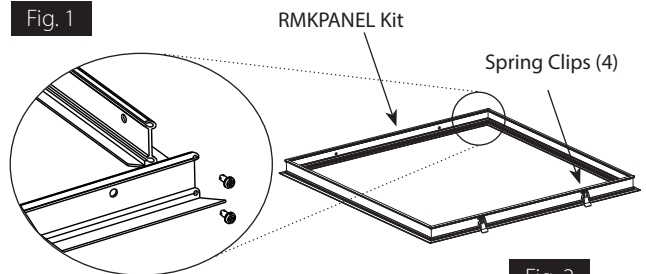


Fig. 2

Fig. 3

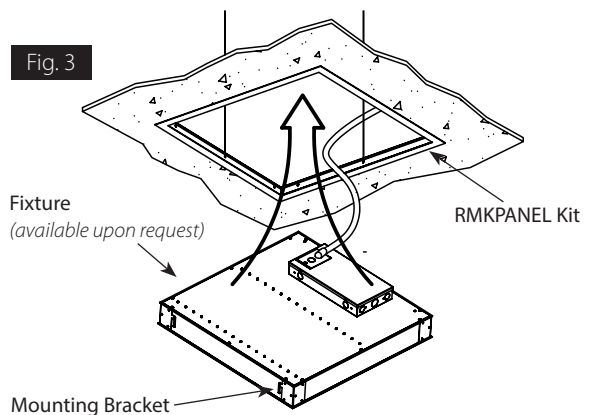

SAFETY INSTRUCTIONS

WARNING: Risk of fire or electric shock. Suitable for damp locations.

WARNING: Install RMKPANEL Kit & Panel per local codes. Suitable for installation in Sheet Rock/ Plasterboard in both Insulated Ceilings and Non-Insulated Ceilings. Not for continuous row mounting.

WARNING: Do not handle energized fixture when hands are wet, when standing on wet or damp surfaces, or in water.

WARNING: Vapor barrier must be suitable for 90° C.

WARNING: RMKPANEL Kit to be independently supported to building structure.

Note: These instructions do not cover all details or variations in equipment nor do they provide for every possible situation during installation, operation or maintenance.

RAB®
© 2021 RAB LIGHTING Inc.
Northvale, New Jersey 07647 USA

Easy Answers

rablighting.com
Visit our website for product info

Tech Help Line
Call our experts: 888 722-1000

e-mail
Answered promptly - sales@rablighting.com

Free Lighting Layouts
Answered online or by request