



<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

Driver Info		LED Info	
Type	Constant Current	Watts	38W
120V	N/A	Color Temp	3000K/4000K/5000K
208V	N/A	Color	90 CRI
240V	N/A	Accuracy	
277V	N/A	L70 Lifespan	15,000 Hours
Input Watts	38W	Lumens	3,600 lm
		Efficacy	95

**Technical Specifications**

**Compliance**

**UL Listed:**

Suitable for wet locations

**Electrical**

**Voltage:**

120V

**Power Consumption:**

4W

**Surge Protection:**

Withstands up to 6000 volts

**Switching Capacity:**

600W @ 120VAC Electronic Ballast (LED)

**Wall Switch Manual Override:**

Two flip logic prevents activation by momentary power outages. Stays on for 6 hours. No extra wiring needed.

**Sensor Specifications**

**Time Adjustment:**

5 seconds to 15 minutes

**Detector Sensitivity:**

Adjustable from 50% to 100%

**Sensor Housing:**

Made of tough, corrosion resistant polycarbonate

**Detection:**

110° view

**Other**

**5 Yr Limited Warranty:**

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).


**Lamp Warranty:**

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of three (3) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

**Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

**Dimensions**

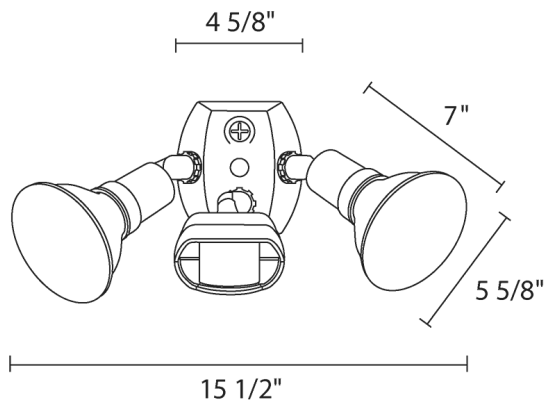

**Features**

- Two CCT-Selectable PAR38s
- 110° view sensor
- 6 Hour protected manual override
- EZ Plate Universal cover fits all boxes

**Ordering Matrix**

Family	Detection	Flood Type	Finish	Lamps/Wattages/CCT
GT	500	R	W	/L

500 = 110° View    R = 120V R90 Flood    **Blank = Black**    /L = 2-Edison Base PAR38 Lamps, 38W, Adjustable CCT: 3000/4000/5000K  
**W = White**