

COMMERCIAL DOWNLIGHT MOUNTING PLATE

Model: 80-959



INSTALLATION AND SAFETY INSTRUCTIONS


IMPORTANT: Read before installing fixture. Retain for future reference.

NEW CONSTRUCTION OR EXISTING DOWNLIGHT INSTALLATION OPTIONS

1. Mount to 16" on-center wood ceiling joists.

2. Mount to 24" on-center wood ceiling joists.

3. Mount to 24" suspended ceiling "T" grid.

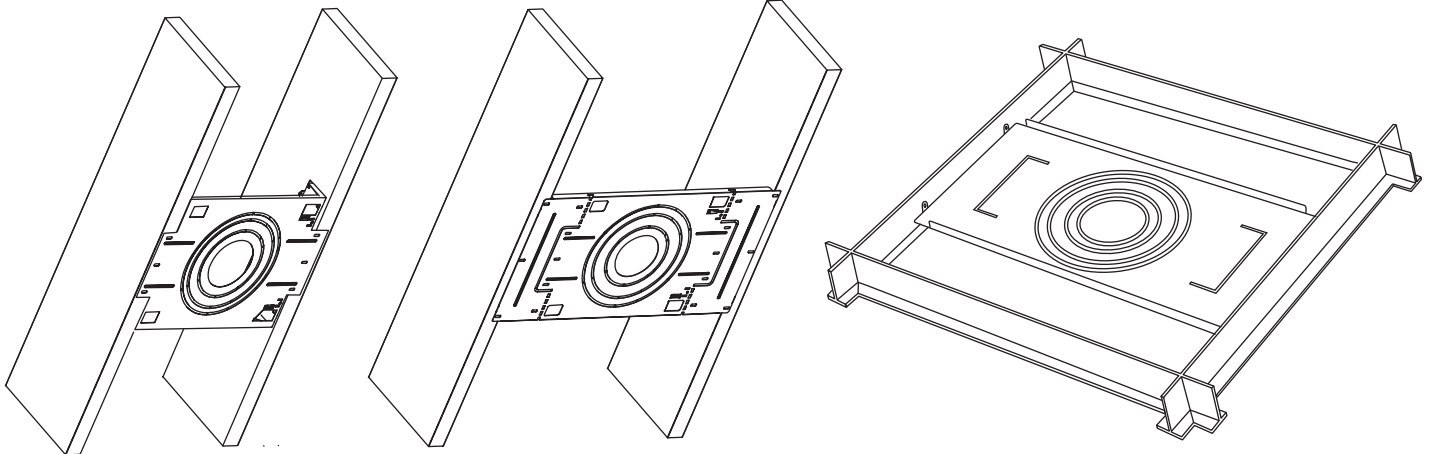

24" "T" Grid

Use mounting tabs with hole for 24" suspended ceiling "T" grid.


24" On-center joists

Use flap tabs for 24" on-center wood joists.

16" On-center joists

Cut flange and bend flaps up for 16" on-center wood joists.

Adjust knock-out diameter to match fixture.

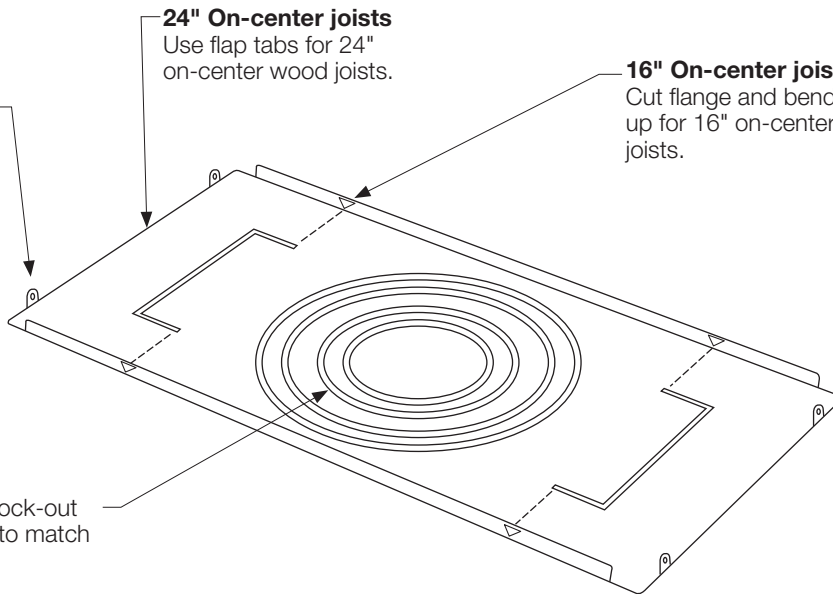

For use with Satco LED Wattage and CCT Selectable Commercial Downlights

S11810—14.5WLED/CDL/4/ADJ-CCT/80D

S11811—23WLED/CDL/6/ADJ-CCT/80D

S11812—32WLED/CDL/8/ADJ-CCT/80D

S11813—46WLED/CDL/10/ADJ-CCT/80D

S11814—14.5WLED/CDL/4/ADJ-CCT/40D

S11815—23WLED/CDL/6/ADJ-CCT/40D

S11816—32WLED/CDL/8/ADJ-CCT/40D

S11817—46WLED/CDL/10/ADJ-CCT/40D



Satco Products, Inc.
Brentwood, NY 11717