


# INSTRUCTIONS


## SMKEZPAN - SURFACE MOUNT KIT INSTALLATION




RAB Lighting is committed to creating high-quality, affordable, well-designed and energy-efficient LED lighting and controls that make it easy for electricians to install and end users to save energy. We'd love to hear your comments. Please call the Marketing Department at 888-RAB-1000 or email: [marketing@rablighting.com](mailto:marketing@rablighting.com)



SMKEZPAN 1X4



SMKEZPAN 2X2

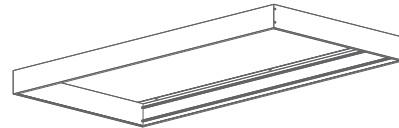

SMKEZPAN 2X4

### IMPORTANT

#### READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.

RAB fixtures must be wired in accordance with the National Electrical Code and all applicable local codes. Proper grounding is required for safety. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

**WARNING: Make certain power is OFF before installing the fixture. No user serviceable parts inside.**

### SURFACE MOUNTING

The fixture is suitable only for **INDOOR SURFACE CEILING** application. To mount on an insulated or non-insulated sheet rock ceiling follow the steps below.

1. Assemble **SMK (Surface Mount Kit)** as shown in **Fig 1** with provided hardware.
2. Center the **SMK** to ceiling over junction box *(by others)* as shown in **Fig 2**. Secure the **SMK** to ceiling with appropriate mounting hardware suitable for the mounting surface as per NEC and local codes, to support weight as per **SMKEZPAN WEIGHT TABLE** below (**Fig 5**).
3. Remove one **End Plate** and slide the **Fixture** *(purchased separately)* into the **SMK** by following directional arrow as shown in **Fig 3**.
4. Install **Fixture** according to product specific instructions and replace **End Plate** with hardware provided (**Fig.4**).

**WARNING: To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.**

Fig. 1

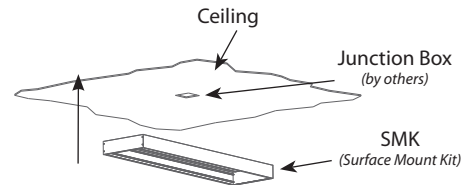


Fig. 2



Fig. 3

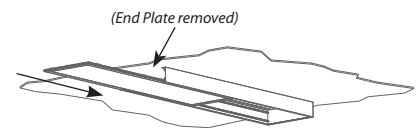


Fig. 4

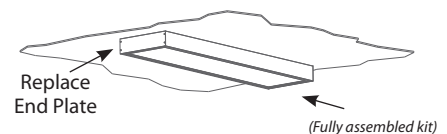


Fig. 5

SMK WEIGHT TABLE

|                    |            |
|--------------------|------------|
| SMKEZPAN 1X4 + SMK | 9.16 lbs.  |
| SMKEZPAN 2X2 + SMK | 7.06 lbs.  |
| SMKEZPAN 2X4 + SMK | 14.06 lbs. |

### SAFETY INSTRUCTIONS

**WARNING: Install SMK (Surface Mount Kit) & Fixture per local codes. Suitable for installation on Sheet Rock/ Plasterboard in both Insulated Ceilings and Non-Insulated Ceilings. Not for continuous row mounting.**

**WARNING: SMK (Surface Mount Kit) to be independently supported to building structure according to NEC and local codes.**

**Note:** These instructions do not cover all details or variations in equipment nor do they provide for every possible situation during installation, operation or maintenance.



SMKEZPAN-IN-0221  
73507-RAB

#### Easy Answers

[rablighting.com](http://rablighting.com)  
Visit our website for product info

Tech Help Line  
Call our experts: 888 722-1000

e-mail  
Answered promptly - [sales@rablighting.com](mailto:sales@rablighting.com)

Free Lighting Layouts  
Answered online or by request

**RAB WARRANTY:** RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).