

Project:

Type:

Prepared By:

Date:



UPC: 19813751535



Features and Benefits

BALLAST BYPASS - Reduces maintenance costs

REPLACE - Conventional fluorescent lamps

Approximately 40% more energy efficient than conventional pin-based CFLs with a G24q base

INSTANT ON - No flicker or hum

111+ lm/W

MERCURY FREE - Environmentally friendly vs fluorescent technologies

Technical Specifications

Product Type	Compact
Bulb Shape	PLC
Finish	Frosted
Wattage	9W
Wattage Equivalency	26W Fluorescent
Typical Lumen Output	1000
Efficacy	111 lm/W
Color Temperature	4000K Cool White
CRI	82
Base Type	G24d
L70 Lifespan	50,000 hours
Operating Temperature	-20°C - 45°C
Dimmable	No
Warranty	5-Year, No-Compromise Warranty
Installation Type	Type B, Ballast Bypass
Installation Orientation	Horizontal
For Use in Emergency Fixtures	No
For Use Outdoors in Open Fixtures	No

Electrical Characteristics

Input Voltage	120-277V
Power Factor	0.9
Operating Frequency	50 / 60 Hz
THDi	<20%



Listings

UL Recognized	Yes
UL Classified	Yes
CEC Status	Lawful for sale in California


Case and Pallet Dimensions

	QTY	LENGTH	WIDTH	HEIGHT
CASE	12	6.5	4.9	7.1
PALLET	4032	47.2	39.4	49.6

Wiring Diagram

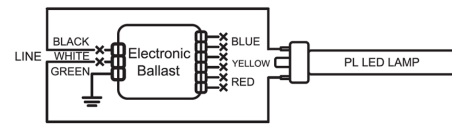

Dimension

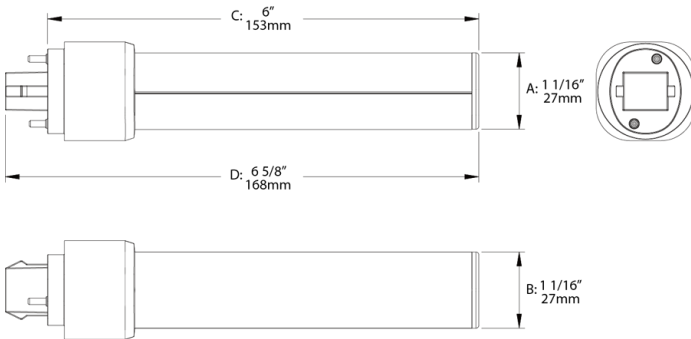

Light Distribution

