

| | | | |
|-----------------|--------------|---------------------|--------------|
| Project: | Type: | Prepared By: | Date: |
|-----------------|--------------|---------------------|--------------|



Features and Benefits

- Energy efficient replacement for incandescent and halogen lamps
- Constructed from durable plastic which lowers risk of breakage
- Rated for use in enclosed and open fixtures in dry or damp locations (>15W A19 is Open fixture rated)
- Frosted lens produces smooth diffuse light
- Longer lifespan compared to legacy equivalents minimizes replacement and maintenance costs
- ENERGY STAR Compliant
- Dimmable with common dimmer types (check compatibility list)

| Technical Specifications | | |
|---|---|--|
| Performance | L70 Lifespan: | Warranty (Years): |
| Product Type: A-Line | 15,000 Hours | RAB warrants that our LED products will be free from defects in materials and workmanship for a period of three (3) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty . |
| Input Wattage: 13W | Dimmable: Yes, down to 10% | Electrical |
| Typical Lumen Output: 1155 | Construction | Power Factor: ≥0.7 |
| Efficacy: 85 lm/W | Bulb Shape: A19 | Operating Temperature: -20°C - 45°C |
| Color Temperature: 5000K Daylight | Base Type: E26 | Input Voltage: 120V |
| CRI: 80 | Beam Angle: 230° | |
| | Other | |
| | Equivalency: 75W Incandescent | |

Technical Specifications (continued)

Electrical

Operating Frequency:

60 Hz

Technical Specifications

For Use in Emergency Fixtures:

No

For Use Outdoors in Open Fixtures:

No

Electrical Characteristics

Input Current @ 120V:

183mA

Compliance

UL Listed:

Yes

ENERGY STAR V2.0:

This product is ENERGY STAR® Version 2.0 Certified

Energy Star ID:

2357499


CEC Status:

Not lawful for sale in California

Case and Pallet Dimensions

| | QTY | LENGTH (in) | WIDTH (in) | HEIGHT (in) |
|---------------|------|-------------|------------|-------------|
| CASE | 12 | 15.4 | 5.2 | 5.3 |
| PALLET | 2016 | 47.2 | 39.4 | 43.3 |

Dimension

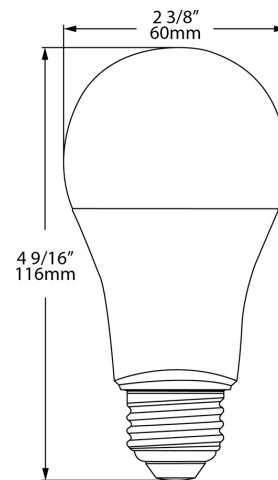

Light Distribution

