

**Project:** \_\_\_\_\_ **Type:** \_\_\_\_\_ **Prepared By:** \_\_\_\_\_ **Date:** \_\_\_\_\_



**Features and Benefits**

Replacement for conventional decorative lamps

Filament LED construction gives a unique traditional look and feel for decorative and ambient applications

Produces rich and vibrant colors, >90CRI

Traditional glass envelop

Rated for use in enclosed and open fixtures in dry and damp locations

Longer lifespan compared to legacy equivalents minimizes replacement and maintenance costs

Title 20 Compliant, ENERGY STAR Compliant, UL Listed

Smooth uniform dimming down to 10% (check dimmer compatibility list)

<b>Technical Specifications</b>		
<b>Performance</b>	<b>L70 Lifespan:</b>	<b>For Use in Emergency Fixtures:</b>
<b>Product Type:</b> Decorative	15,000 Hours	No
<b>Input Wattage:</b> 5W	<b>Dimmable:</b> Yes, down to 10%	<b>For Use Outdoors in Open Fixtures:</b> No
<b>Typical Lumen Output:</b> 500	<b>Construction</b>	<b>Other</b>
<b>Efficacy:</b> 91 lm/W	<b>Bulb Shape:</b> BA11	<b>Equivalency:</b> 60W Incandescent
<b>Color Temperature:</b> 2700K Soft White	<b>Base Type:</b> E26	<b>Warranty (Years):</b> RAB warrants that our LED products will be free from defects in materials and workmanship for a period of three (3) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at <a href="http://rablighting.com/warranty">rablighting.com/warranty</a> .
<b>CRI:</b> 90	<b>Beam Angle:</b> 360°	
	<b>Technical Specifications</b>	
	<b>Finish:</b> Clear	

**Technical Specifications (continued)**

**Electrical**

**Power Factor:**

0.7

**Operating Temperature:**

-20°C - 45°C

**Input Voltage:**

120V

**Electrical Characteristics**

**Flicker:**

<30%

**Compliance**

**ETL Qualified:**

Yes

**ENERGY STAR V2.0:**

This product is ENERGY STAR® Version 2.0 Certified

**Energy Star ID:**

2330370


**CEC Status:**

Lawful for sale in California

**Case and Pallet Dimensions**

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
<b>CASE</b>	12	6.5	4.9	5.1
<b>PALLET</b>	3180	38.4	46.3	37.2

**Dimension**

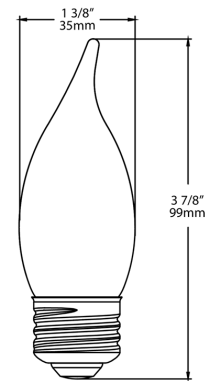

**Light Distribution**

